

Final Report

MRF Quality Assessment Study



Material quality assessment of municipal MRFs within the UK

WRAP helps individuals, businesses and local authorities to reduce waste and recycle more, making better use of resources and helping to tackle climate change.

Written by: Enviro Consulting



Front cover photography: Manual Picking © Enviro 2009

WRAP and Enviro Consulting Ltd believe the content of this report to be correct as at the date of writing. However, factors such as prices, levels of recycled content and regulatory requirements are subject to change and users of the report should check with their suppliers to confirm the current situation. In addition, care should be taken in using any of the cost information provided as it is based upon numerous project-specific assumptions (such as scale, location, tender context, etc.).

The report does not claim to be exhaustive, nor does it claim to cover all relevant products and specifications available on the market. While steps have been taken to ensure accuracy, WRAP cannot accept responsibility or be held liable to any person for any loss or damage arising out of or in connection with this information being inaccurate, incomplete or misleading. It is the responsibility of the potential user of a material or product to consult with the supplier or manufacturer and ascertain whether a particular product will satisfy their specific requirements. The listing or featuring of a particular product or company does not constitute an endorsement by WRAP and WRAP cannot guarantee the performance of individual products or materials. This material is copyrighted. It may be reproduced free of charge subject to the material being accurate and not used in a misleading context. The source of the material must be identified and the copyright status acknowledged. This material must not be used to endorse or used to suggest WRAP's endorsement of a commercial product or service. For more detail, please refer to WRAP's Terms & Conditions on its web site: www.wrap.org.uk

Executive Summary

Enviros were commissioned by WRAP to undertake a nationwide (England, Wales and Northern Ireland) assessment of the composition and quality of material currently being sent to MRFs and the associated quality of material then sent to reprocessors. In all 17 MRFs were included in the survey. A parallel project was commissioned, with Resource Futures, for Scotland which recruited 1 MRF. All numbers and analysis in this report cover all 18 sampled MRFs.

The aim of these projects was to provide robust data on the composition of input, output and residual waste material at MRFs to provide information on the quality of material processed at MRFs and inform the waste management industry on current material quality benchmark thresholds.

A range (upper, lower and median) of contamination was identified for the input and each output material:

- **lower level** – 25th percentile bound, meaning that one quarter of the MRF contamination was at this level or below i.e. achieving this level of average contamination or better is very good in comparison to the rest of the sector;
- **middle level** – 50% (or half) of the average output from MRF samples were in this range i.e. achieving this level of contamination is on average comparable with the sector; and
- **upper level** – 75th percentile bound, meaning that one quarter of the MRF contamination was at this level or higher i.e. achieving this level of average contamination or higher is poor in comparison to the rest of the sector.

Basically, the MRFs with the lowest material contamination are shown in the lower level range. The 18 MRFs consisted of 13 single-stream MRFs and 5 twin-stream MRFs.

The analysis of these ranges can be done from two perspectives; that of comparing all the 4,676 individual samples taken; or that of comparing the average results for each of the 18 MRFs. The use of the individual samples may skew the ranges by allowing more weight to unusually good or bad MRFs, whereas the comparison of overall MRF figures is perhaps more realistic for benchmarking. For this report all analysis is carried out on MRF averages, with no data removed as sample sizes are low for some material streams.

The table below gives a quick and easy-to-use benchmarking comparison for MRFs. More detail on these ranges is given in the main body of this report, in particular MRF type breakdowns are given for output materials.

Benchmarking ranges based on MRF average contamination figures			
Material Stream	Lower Level	Median Level	Upper Level
Input Material All			
All	< 6.4%	6.4% to 17.5%	> 17.5%
Single-stream	< 8.4%	8.4% to 17.5%	> 17.5%
Twin-stream – Fibre based	< 2.9%	2.9% to 9.0%	> 9.0%
Twin-stream – Container based	< 4.9%	4.9% to 22.6%	> 22.6%
Output Material			
Aluminium	< 0.9%	0.9% to 4.6%	> 4.6%
Steel	< 2.8%	2.8% to 7.1%	> 7.1%
News and PAM	< 4.6%	4.6% to 15.0%	> 15.0%
Mixed Paper	< 3.2%	3.2% to 25.3%	> 25.3%
Card	< 4.8%	4.8% to 12.0%	> 12.0%
Mixed Plastic	< 6.9%	6.9% to 26.6%	> 26.6%
Mixed Plastic bottles	< 8.3%	8.3% to 16.2%	> 16.2%
HDPE Coloured Plastic Bottles	< 6.9%	6.9% to 11.3%	> 11.3%
HDPE Natural Plastic Bottles	< 1.9%	1.9% to 4.0%	> 4.0%
PET Clear	< 2.6%	2.6% to 9.5%	> 9.5%
PET Coloured	< 5.6%	5.6% to 10.7%	> 10.7%
Residual (contamination is targeted material)			
All	< 28.3%	28.3% to 80.9%	> 80.9%
Single-stream	< 24.7%	24.7% to 61.7%	> 61.7%
Twin-stream – Fibre based	< 33.0%	33.0% to 59.2%	> 59.2%
Twin-stream – Container based	< 72.2%	72.2% to 88.0%	> 88.0%

Contents

- 1.0 Introduction 5**
 - 1.1 Background 5
 - 1.2 Aims and objectives 5
 - 1.3 Approach 5
- 2.0 Sampling at as many MRFs as possible 5**
- 3.0 Classification of the MRFs 6**
- 4.0 Collect composition data from the MRFs 7**
 - 4.1 How much waste? 7
 - 4.2 What type of sampling? 8
 - 4.3 What is the composition of the waste sampled? 8
 - 4.3.1 Input material 9
 - 4.3.2 Residual material 11
 - 4.3.3 Output material 12
- 5.0 MRF contamination ranges 17**
 - 5.1 Overview of contamination levels 17
 - 5.2 Material stream contamination benchmarking 18
 - 5.2.1 Input material contamination 18
 - 5.2.2 Residual material contamination 19
 - 5.2.3 Output material contamination 20
- 6.0 Updated sampling regimes 24**
- 7.0 Conclusions 26**
- Appendix 1: Abbreviations 30**
- Appendix 2: Composition tables 31**

1.0 Introduction

1.1 Background

Enviros were commissioned by WRAP to undertake a nationwide (England, Wales and Northern Ireland) assessment of the composition and quality of material currently being sent to MRFs and the associated quality of material then sent to reprocessors. In all 17 MRFs were included in the survey. A parallel project was commissioned, with Resource Futures, for Scotland which recruited 1 MRF. All numbers and analysis in this report cover all 18 sampled MRFs.

This report is for MRF benchmarking and analyses the average figures for each of the 18 MRFs. As some material streams are only targeted by a small number of the MRFs no outlying figures have been excluded so as to maintain as much comparable data as possible.

1.2 Aims and objectives

The aim of these projects was to provide robust data on the composition of input, output and residual waste material at MRFs across England, Wales, Northern Ireland and Scotland. The data provides information on the quality of material processed at MRFs and can be used to inform the waste management industry on current material contaminant levels. There were six main project objectives:

- 1 recruiting and sampling at as many MRFs as possible;
- 2 define appropriate MRF sector classifications;
- 3 collate waste composition data on statistically representative samples of input, output and residual material;
- 4 assess the variability in the composition of material samples across MRF sector classifications;
- 5 identify a range (i.e. upper, lower and median) of contamination for input and each output material; and
- 6 using the data collected update recommendations within the current WRAP MRF sampling guidance¹ on the number and weight of samples required to ensure a robust ongoing monitoring regime.

This report is intended to provide summary responses to all of these objectives. It is not the intention of this report to comment or recommend that any particular MRF technology, design or configuration produces a particular quality of output material or separation performance.

For simplicity, there are a number of abbreviations used in the charts and tables presented throughout this report. A list of these abbreviations is in Appendix 1.

1.3 Approach

MRFs were selected through initial approaches from WRAP and final recruitment and confirmation from Enviros in England, Wales and Northern Ireland and Resource Futures in Scotland. It was agreed that the MRFs would either be: trained in how to sample and then supported in the process, of which there were 8 MRFs; or the sorting would be carried out by an Enviros team, of which there were 10 MRFs.

The sorting was carried out over intensive 5 to 10 day periods for the Enviros sort MRFs and over a more extended 2 or 3 month period for the self-sorting MRFs. Each sample was hand sorted into 19 material categories on top of a 45mm sorting screen. Material that fell through the screen was classified as miscellaneous <45mm with the exception of samples of aluminium outputs and residual material where the material <45mm was sorted again into the same 19 material categories.

The sample weights, numbers of samples and sorting screen size were all taken from the WRAP MRF sorting protocol document. The definition of input, output and residual streams and the identification of sampling points was undertaken in conjunction with each MRF and WRAP.

2.0 Sampling at as many MRFs as possible

The number of MRFs included in the project has been maximised through rigorous recruitment and communication with the MRF operators and owners. The final number taking part was 19% of the UK MRFs at 18 out of 93.

¹ Report on the conclusion of Phase 2: practical field trials of material sorting and sampling techniques (*WRAP April 2008*)

MRFs were unable to take part for a variety of practical and business reasons including space on the site (as the recycle market was slow at the beginning of 2009) and limited staff resource. There had been a hope that most MRFs would receive training and then carry out their own sorting, as this would add skills and experience into the MRF. However the limited staff resource meant there were more ‘full-sort’ MRFs than ‘training’ MRFs.

3.0 Classification of the MRFs

A site visit was made once a MRF was recruited during which various details of the MRF were collected. This included basic information on the configuration, confirmation on the type of input materials and target output materials as well as a health and safety assessment for on-site work. The configuration information detailed the material handling and material separation technologies for the MRF.

At the inception of the project it had been hoped that this information would allow the classification of the MRFs into clearly defined groups / sectors based upon the technology used. It soon became clear that various factors made this task impractical. Firstly the fact that only 18 MRFs were included means that any range of classes would have little or no statistical validity.

The second point is that the design and operation of a MRF is very specific to local operating conditions and contractual commitments. The original purpose of groups/sectors was to define them by factors that could restrict or influence the MRFs ability to affect material quality; whereas in fact any MRF can achieve any quality of material and the number of different combinations used to achieve this is too broad. If we had standardised on the design and operation at the time of the visit the potential classes would have had so few MRFs in each that the grouped analysis would have given no advantage over individual analysis.

The other area for classification looked at was in terms of materials processed. The output materials of the MRFs are related to the inputs and this area did allow for one classification of MRFs by how the material was presented; as either a single input stream or two input streams.

Figure 1 Single-stream (Type 1) input and material processing MRF arrangement


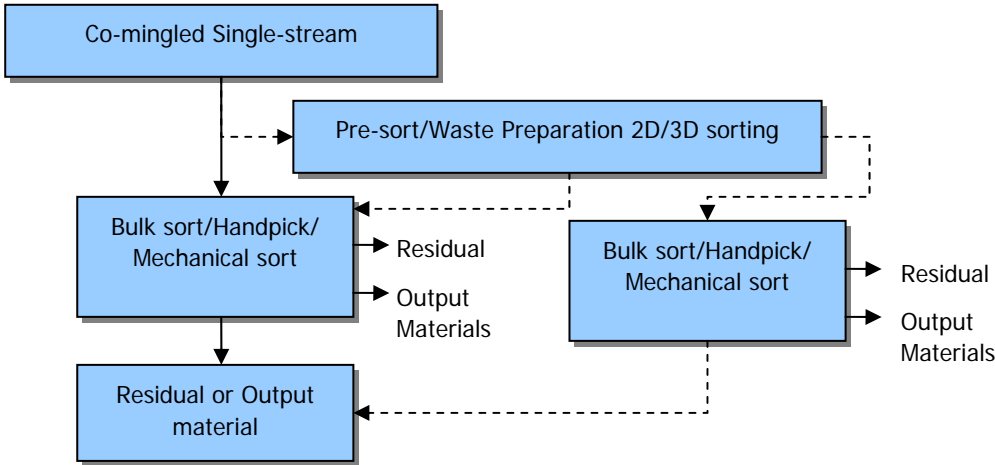


Figure 2 Twin-stream (Type 2) input and material processing MRF arrangement

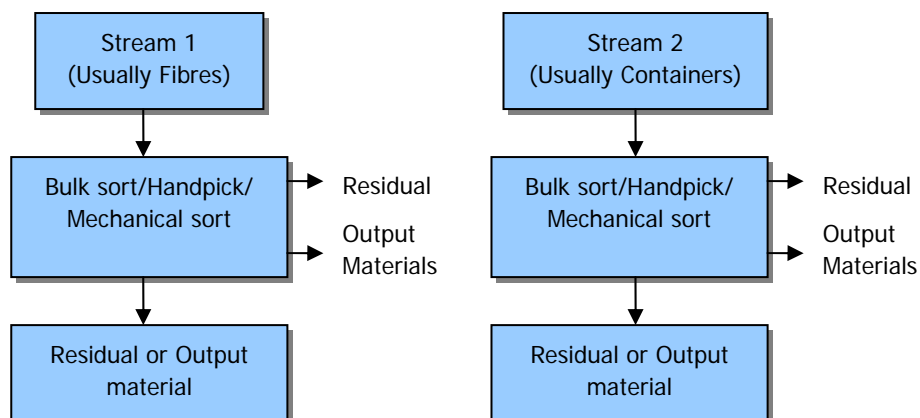

In a single-stream MRF the input material is presented in one co-mingled mix (Type 1). In twin-stream MRFs there are two different co-mingled inputs, usually one of co-mingled fibres (paper, card etc) and one of containers (HDPE, PET bottles etc) (Type 2). Whilst theoretically both MRF types could achieve similar output material quality, the risk of cross contamination between fibre based materials and containers is likely to be less where this material is collected separately rather than a single mix. The 18 MRFs were split 13 of Type 1 and 5 of Type 2.

Overall the project agreed that the data report would manage the analysis by classification of MRFs by reviewing the material quality in the two types and across each anonymous MRF. This report only considers the composition and material quality (i.e. level of contamination) across all MRFs sampled and then by the two classification types.

4.0 Collect composition data from the MRFs

4.1 How much waste?

Around 272 tonnes of material was hand sorted over a 6 month period from a total of 18 MRFs. Around 115 tonnes of material was sorted by 8 training MRFs and 157 tonnes of material was sorted by the Enviro project sorting team from 10 full sort MRFs. In terms of MRF sector classification there was 190 tonnes of waste sorted from Type 1 (single input stream) and 82 tonnes of waste from Type 2 (two input streams).

The 272 tonnes was made up of 85.7 tonnes of input material, 179.8 tonnes of output material and 6.6 tonnes of residual material. Table 1 below shows these tonnages are broken down by MRF sector, sampling approach (i.e. training or full sort, and sample type).

Table 1 Quantity of material sampled

Type	Data Type	Input		Outputs		Residual	
		Number of Samples Sorted	Total Weight of Material Sorted (kg)	Number of Samples Sorted	Total Weight of Material Sorted (kg)	Number of Samples Sorted	Total Weight of Material Sorted (kg)
Type 1	Full	40	4,210	190	9,413	10	264
Type 1	Full	41	3,595	102	3,459	11	302
Type 1	Training	40	4,017	202	10,543	10	315
Type 1	Training	40	4,630	189	10,976	10	365
Type 1	Training	44	4,684	239	13,718	11	444
Type 1	Training	41	4,648	262	12,053	10	314
Type 1	Full	40	4,531	270	14,069	10	334
Type 1	Full	39	2,328	226	11,562	10	265
Type 1	Full	40	4,160	230	13,231	10	418
Type 1	Full	40	4,297	250	11,769	10	289
Type 1	Full	40	3,874	264	13,432	10	614
Type 1	Training	40	3,844	150	5,597	10	305
Type 1	Training	37	2,621	91	4,740	6	188
Type 1 training		242	24,444	1,133	57,627	57	1,931
Type 1 full sort		280	26,995	1,532	76,935	71	2,486
Type 1 sub total		522	51,439	2,665	134,562	128	4,417
Type 2	Training	80	7,087	170	5,577	10	188
Type 2	Training	80	7,724	230	10,164	20	546
Type 2	Full	40	4,594	190	10,177	10	329
Type 2	Full	80	9,978	250	12,429	20	825
Type 2	Full	40	4,918	131	6,874	10	321
Type 2 training		160	14,811	400	15,741	30	734
Type 2 full sort		160	19,490	571	29,480	40	1,475
Type 2 sub total		320	34,301	971	45,221	70	2,209
Total training		402	39,255	1,533	73,368	87	2,665
Total full sort		440	46,485	2,103	106,415	111	3,961
Total		842	85,740	3,636	179,783	198	6,626

4.2 What type of sampling?

The sampling for this project was based on understanding the contamination levels of the material streams at the MRFs. So the sampling strategy at the MRFs was set to enable statistical validity of the contamination levels within the sample set. The numbers and weights of samples were based on research undertaken by WRAP on a previous project. There was no attempt to weight the sampling according to the throughput tonnage of each MRF or any observations around the relative balance of input in the two-streams of a Type 2 MRF. Also, within any particular MRF, the sampling of each input, output and residual stream was carried out independently. In essence this means that the figures quoted in this report around composition are valid and accurate but should not be used to scale up to a full material mass balance.

4.3 What is the composition of the waste sampled?

The following sections discuss the composition of the input, residual and output streams from the MRFs. Summary graphs and tables are presented in each section, but the full compositional results for the 'All MRF', 'Type 1' and 'Type 2' MRFs are shown in Tables A2.1, A2.2, and A2.3 in Appendix 2.

4.3.1 Input material

The compositional result for input material is represented below in Figure 3,4,5. Naturally the inputs to the MRF come in the main from local authority kerbside collections, so Table 2 shows the make up of the input samples in this study grouped by the four main categories of materials collected at the kerbside (excluding glass). In terms of the sorting categories (see Appendix 1, Table A1 for abbreviations) these cover:


- **paper:** News & Mag, Other R Pa;
- **plastic bottles:** Clr PET, Col PET, Nat HDPE, Col HDPE, Oth bott;
- **card:** Brwn brd, G&W brd; and
- **cans:** Alu cans, Ste cans.

Table 2 Main materials in input material sampled

Material	% Composition		
	Full Data	Type 1 MRFs	Type 2 MRFs
Paper	36.8	46.6	20.8
Plastic Bottles	17.6	10.4	28.5
Card	14.6	16.6	11.3
Cans	15.0	7.5	27.3
Other	16.0	18.9	12.1


Whilst not a mass flow of input material received at MRF, this does indicate that the most common material in the input samples is paper, with bottles, card and cans at similar but much lower percentages. Type 1 MRFs follow the main pattern but for Type 2 there is a more even split between bottles and cans, with paper third. This may be due to a bias introduced as each of the two-streams was sampled equally by number of samples, and not weighted to the ratio of each stream (as mentioned in section 4.2).

Figure 3 Inputs, outputs and residual composition across all MRFs

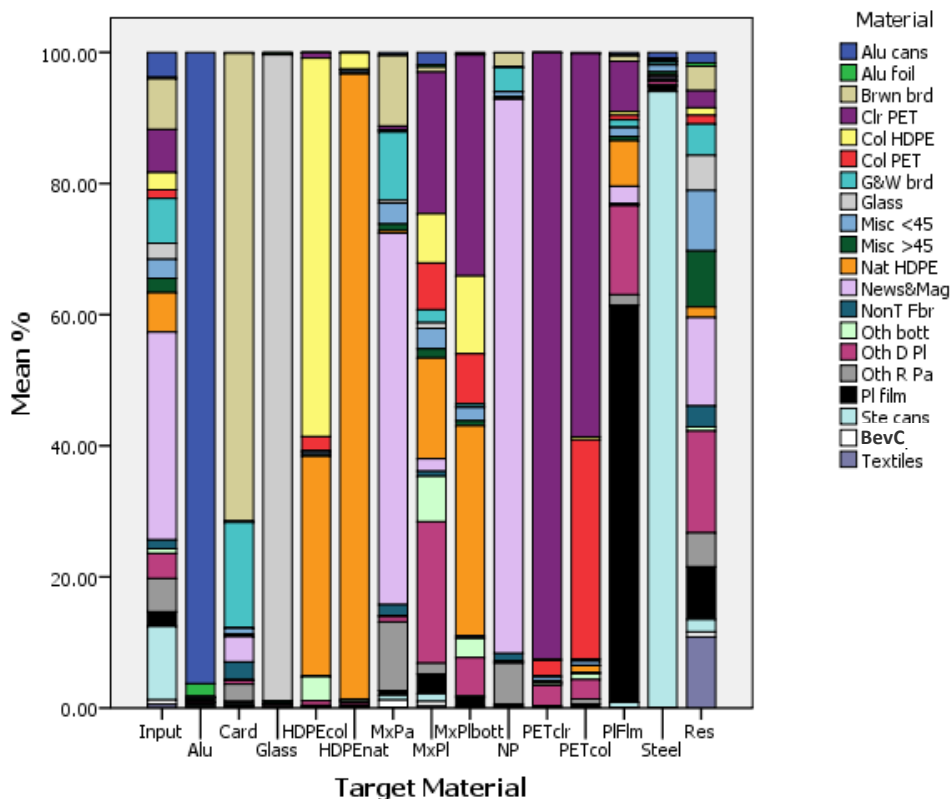


Graph produced from SPSS.

Figure 4 Input, output and residual composition across all Type 1 single-stream MRFs

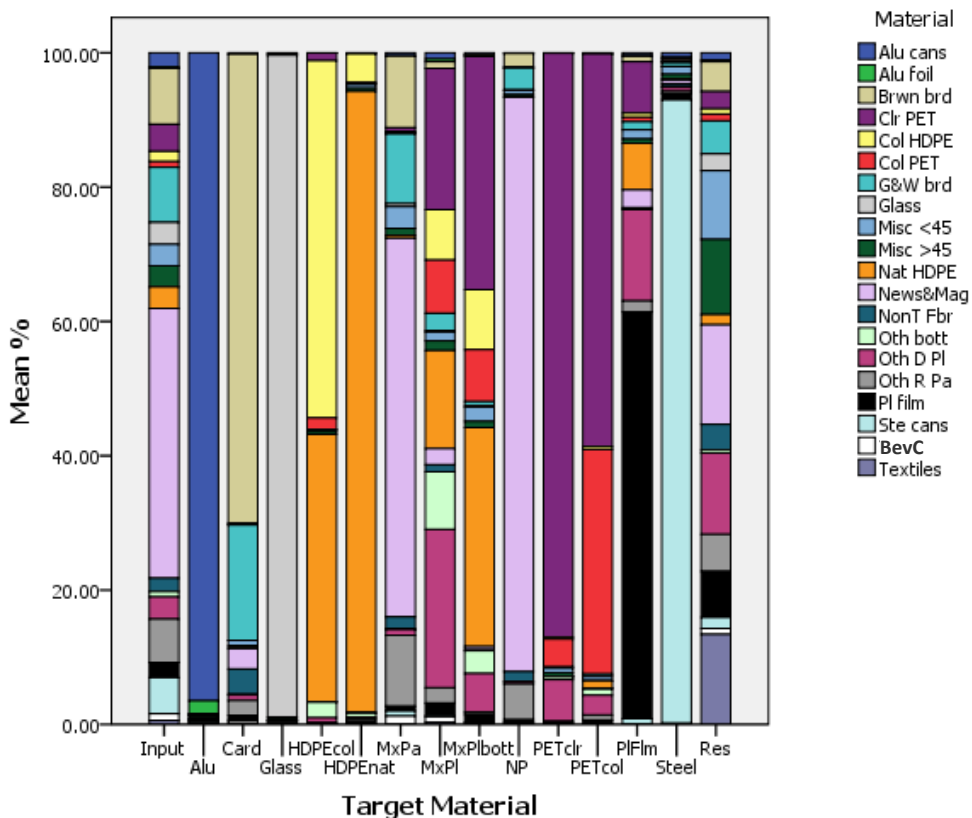

Graph produced from SPSS.

Figure 5 Input, output and residual composition across all Type 2 twin-stream MRFs

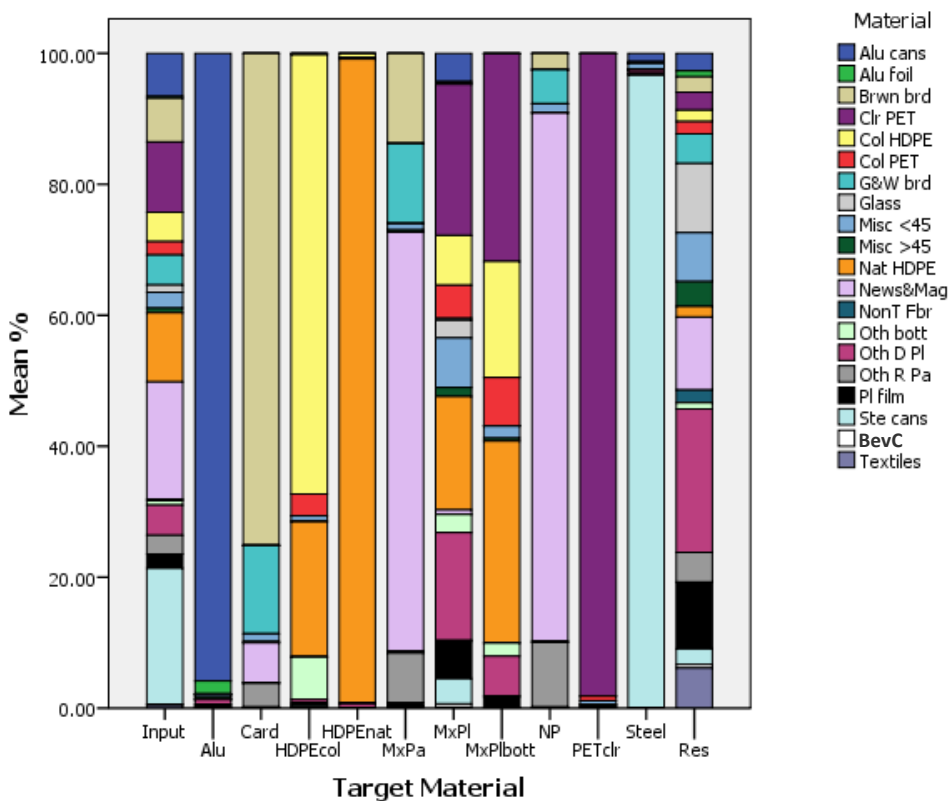

Graph produced from SPSS.

4.3.2 Residual material

A quantity of materials received at a MRF is either missed by the process at the MRF and not recovered to the output streams, or should not have been in the input: these leave the MRF in the residual waste.

In some cases materials are accepted in the input stream but not recovered as an output and so leave the MRF in the residual waste. This is done to accommodate the varying types of material collected across different authorities that feed into the same MRF and/or to increase participation and/or material capture rates by including a simple message to the public; “plastics” rather than the targeted material “HDPE and PET plastic bottles” for example. Within some MRFs it was noted that some materials that would normally be left to leave the MRF in the residual waste are recovered and sold as an output material due to the volume of contaminating material received in the input.

The main materials (those of more than 10% composition) in the residual waste for the full data set and for single-stream Type 1 MRFs are dense plastic, newspaper and magazines, textiles and miscellaneous. For twin-stream Type 2 MRFs the textiles are replaced by glass and plastic film.

Table 3 Main materials in residual material sampled

Material	% Composition		
	Full Data	Type 1 MRFs	Type 2 MRFs
Dense Plastic	15.5	12.1	21.9
News & Mags	13.5	14.8	11.1
Textiles	10.8	13.4	6.7
Misc (<45 & >45)	17.8	21.4	11.2
Glass	5.4	2.5	10.6
Plastic Film	8.0	6.9	10.2
Other	29.0	28.9	28.9

It is not surprising that ‘miscellaneous’ makes up a large proportion due to the various processes the materials have been through. The miscellaneous materials arrives in the residual waste either by being positively picked or removed as contaminant as part of a quality control process or left on the conveyor once all other output materials are positively picked. The materials included within this category are ‘true contaminating materials’ that were not targeted by the MRF. They will comprise composite materials or unidentifiable material i.e. material that is severally contaminated beyond recognition such as paper soaked in food liquid.

Dense plastic is only targeted in 8 of the 18 MRFs but due to a lack of public awareness can be put into the kerbside collection schemes and so it comes through into the residual. Paper is invariably targeted into different output grades within a MRF but comes through into the residual. This can be a result of the different separation processes involved and the different particle size ranges of the material. For example, if newspaper and magazines are positively picked as an output material then the material remaining on the conveyor belt continues into the residual. So paper with a small particle size range maybe missed. Unless mechanical or optical sorting equipment is 100% efficient again not all material will be recovered. The speed of the conveyor picking belt will also influence how much of the paper is picked. MRF throughput versus output material quality or the proportion of targeted material leaving the MRF as residual is often a local commercial decision. The difference with textiles will be biased due to it being targeted in only 2 of 13 single-stream Type 1 but 2 of 5 Type 2 MRFs.

The residual waste should contain a minimum amount of the materials generally targeted by the authority collection schemes (as per Table 2). The percentage of the residual due to each of these materials is shown in Table 4. This is illustrative and not the same as the actual missed recycle in the residual as the different MRFs accept a range of materials. An interesting point is that paper is the main common input material in the residual waste probably due to the reasons already outlined. Plastic bottles, card and cans are of broadly similar proportions. These figures should be as close to 0% as possible. However, this probably reflects the efficiency of the various sorting options operating within a MRF. Clearly, the proportion of common input materials in the residual waste is a reflection of residual waste not being positively removed but instead being the point at the end of the MRF process once all output materials have been removed. For example, it is unlikely that plastic bottles would be positively picked as a contaminant and placed into the residual waste stream.

Table 4 Common targeted materials in residual material sampled

Material	% Composition		
	Full Data	Type 1 MRFs	Type 2 MRFs
Paper	18.7	20.3	15.7
Plastic Bottles	7.3	6.3	9.0
Card	8.5	9.3	6.9
Cans	3.5	2.7	5.0
<i>Other</i>	<i>62.0</i>	<i>61.4</i>	<i>63.4</i>

4.3.3 Output material

The outputs categories to be sampled were dictated by the materials that are targeted at each MRF and those requested to be sampled by WRAP. Not all output materials at each MRF were sampled. The list of the headline materials is quite standard with the occasional material only targeted by a few MRFs. However another area of difference across the MRFs was which sub-category they accept in the headline material (e.g. foil in aluminium cans).

For the 18 MRFs in the survey the number that targeted each material stream is shown in Table 5 as is the number of those streams that were sampled.

Table 5 Materials targeted at # of 18 MRFs in project

	Targeted by # MRFs	Sampled at # MRFs
Aluminium	18	18
Steel	18	18
News & PAMs	12	12
Card	14	12
Mixed Paper	10	9
Mixed Plastic	8	8
Mixed Bottles	8	8
Plastic Film	8	1
Nat HDPE	6	6
Clear PET	5	4
Textiles	4	0
Col HDPE	3	3
Glass	3	1
Col PET	2	2
Bev Cartons	1	0

The output materials at the MRFs are by-and-large made up of the correct type of material, e.g. all forms of plastic output are mainly plastic (rather than metal or paper based materials), however within each specific output stream there can be a mixture of materials. This section captures some of the key findings from this analysis.

For the main output streams that were sampled the results are shown in Figures 6,7 and 8 (the full data is in Appendix 2). It should be noted that the following analysis looks at the composition of each stream and not the contamination. Having material other than the main category is not the same as contamination, as what is acceptable in the main category can vary between MRFs. For example coloured PET can have clear PET in it, so Clear PET is not a contaminant and the MRF may not attempt to separate it.

Table 6 has the summary data for Figure 6 and shows that the can streams are very closely controlled and well segregated. This is almost certainly a function of the value of these streams to the MRF and the technology used to separate them being robust and in most cases unlikely to pick the wrong material, e.g. a magnet will pick up

ferrous based material such as steel cans and an eddy current separator non-ferrous materials such as aluminium cans. However, like any bulk separation process, this can and will capture other material that is either wrapped around the targeted material, gets caught up in the recovery, or is similar in magnetic/non-magnetic properties. For example beverage cartons where the internal lining has similar material properties to aluminium so it can get recovered by an eddy current separator.

The proportion of 'non-cans' in the aluminium is lower than for steel which is thought to be driven primarily by the significant higher aluminium revenue and purity requirements specified by the reprocessor. In most cases this justifies the additional investment in further quality control procedures after the bulk separation process. Aluminium cans contamination is lower in Type 2 MRFs. This is not surprising as the Type 2 MRFs surveyed during this project were smaller scale MRF operations with lower throughputs than the single-stream Type 1 MRFs, therefore the costs of additional quality control after the eddy current separator are less.

A further point to note is that a magnet to recover ferrous materials is often positioned before the eddy current separator, therefore, as this bulk separation process is recovering targeted materials from a greater mix of materials the risk of other materials getting caught in this recovery process is higher than during the aluminium recovery process which is often at the end of the process from a simple material mix.

The proportion of non-steel can material is less in twin-stream Type 2 MRFs. For Type 2 only container based materials are being processed on the container conveyor when steel cans are being recovered by the over band magnet, whereas in single-stream Type 1 MRFs the over band magnet tends to operate over a greater mix of material and hence greater risk of picking up other contaminating materials during the process.

Table 6 Composition of can based outputs by each metal category and non-metal categories

Cans Outputs	Alu Cans % Composition			Steel Cans % Composition		
	Full Data	Type 1 MRFs	Type 2 MRFs	Full Data	Type 1 MRFs	Type 2 MRFs
Aluminium Cans	96.29	96.47	95.84	0.84	0.67	1.25
Aluminium Foil	1.98	1.98	1.98	0.12	0.13	0.1
Steel Cans	0.25	0.28	0.17	93.93	92.81	96.67
<i>Non-cans/foil</i>	<i>1.48</i>	<i>1.27</i>	<i>2.00</i>	<i>5.12</i>	<i>6.39</i>	<i>1.99</i>

Table 7 has the summary data for Figure 7 and shows that there is a relatively good separation of card and news and PAMs in their own streams. However, there is a mixture of paper types in each of the output materials. The mixed paper is made up of over half News and PAMs and a further fifth of card.

These results are in line with the expectation when the relative financial value of the news and PAMs and mixed paper streams are considered. At the time of this project the price differential was lower and so the need to maximise News and PAMs was not strong. There is also a need for some News and PAMs in the mixed paper stream in order to meet the reprocessor specifications.

The card outputs consist primarily of card based material most of which is corrugated brown board material which is often recovered at the pre-sort stage.

The News and PAM outputs are over 80% newspaper and magazines and in total around 90% when including other recyclable paper which is often included in this material specification. Whilst there is some non-targeted fibre (more so in single-stream Type 1 MRFs thought to be a result of more mechanical and optical sorting processes) this figure is low as is the quantity of non-fibre based materials. As expected the proportion of non-fibre based materials is higher in single-stream Type 1 MRFs where the News and PAM output is sorted from a mix of materials in comparison twin-stream Type 2 MRFs where the material is sorted from fibre input stream.

Table 7 Composition of 'paper and card' based outputs as by each 'paper and card' category and non-'paper and card' categories

Paper and Card Outputs	Card % Composition			Mixed Paper % Composition			News and PAMs % Composition		
	Full Data	Type 1 MRFs	Type 2 MRFs	Full Data	Type 1 MRFs	Type 2 MRF	Full Data	Type 1 MRFs	Type 2 MRF
Brown Board	71.35	69.83	75.13	10.76	10.67	13.75	2.13	2.04	2.49
G&W Board	16.12	17.18	13.49	10.45	10.40	12.18	3.67	3.30	5.18
News & Mags	3.90	3.03	6.05	56.64	56.41	63.89	84.54	85.52	80.61
Other Recy Paper	2.62	2.21	3.64	10.49	10.58	7.61	6.22	5.31	9.89
Non-targeted fibre	2.69	3.73	0.10	1.70	1.75	0.28	1.23	1.48	0.22
<i>Non-Paper & Card</i>	<i>3.33</i>	<i>4.02</i>	<i>1.61</i>	<i>9.95</i>	<i>10.19</i>	<i>2.30</i>	<i>2.21</i>	<i>2.36</i>	<i>1.62</i>

Table 8 has the summary data for Figure 8 and shows that the plastic outputs consist of a large mix of material types. The clear PET and natural HDPE are the two main plastic streams that contain the least other dense plastics. This is likely to be due to the constraints on quality enforced by the markets, the higher price these two materials attract and the nature of the materials. These two material outputs tend to be positively picked from the conveyor or targeted by optical sort processes. The coloured HDPE and coloured PET outputs generally contain some of the natural and clear counterpart. The issue here is in the potential loss of the price differential by having the natural and clear material in the coloured output. The analysis clearly shows some MRF configurations are positively collecting these materials together rather than separating them into their polymer types, which will be a local consideration on the economic viability of the investment required, and expected return, to warrant these materials being kept separate. However, what is clear is that even when natural and coloured HDPE and PET are collected separately within the same MRF, a large proportion of the clear bottles are still collected in the coloured stream resulting in a potential loss of income which could be rectified without significant investment.

Mixed plastic and mixed plastic bottles are, as expected, a mix of the various grades of plastic, but the higher value natural HDPE and clear PET may need to be in the mix to meet the market needs, however this analysis is not known as part of this report. What is interesting to note is that mixed plastic is the only output stream with a significant amount of completely unconnected materials present. Overall nearly 20% of the mixed plastic is fibre, metal, plastic film or <45mm miscellaneous. Further work could be done to investigate this but it may be related to the point of the process that mixed plastic is collected. The other materials are positively picked out and the mixed plastic is often negatively picked remaining as 'last off the line' it will almost certainly pick up more residual material depending on the effectiveness of the quality control procedures within the MRF for removing residual contaminants. In most cases the MRFs collecting mixed plastics only positively picked one other plastic output either as mixed bottles, PET or HDPE natural bottles with the remaining mix of plastics being retained in the mixed plastic output. There were a number of opportunities to recover additional polymer types through either optical or manual sorting, however a point of consideration raised is that if all of the 'high value' bottle polymers are removed from the mixed plastic, this action in itself as noted above could reduce the value of the mixed plastic output or make this product unmarketable.

Table 8 Composition of dense plastic based outputs as each dense plastic category and non-dense plastic categories

Dense Plastic Outputs % Comp	HDPE Coloured			HDPE Natural			Mixed Plastic		
	All	Type 1	Type 2	All	Type 1	Type 2	All	Type 1	Type 2
Clear PET	0.82	1.14	0.14	0.04	0.06	0.02	21.61	21.03	23.06
Col PET	2.22	1.68	3.33	0.08	0.11	0.05	7.11	7.92	5.04
Col HDPE	57.73	53.19	67.12	2.44	4.31	0.58	7.54	7.50	7.63
Nat HDPE	33.57	39.83	20.65	95.45	92.50	98.40	15.39	14.62	17.34
Oth Bottles	3.69	2.34	6.49	0.33	0.61	0.04	6.93	8.57	2.77
Oth Dense Plastic	0.69	0.74	0.58	0.40	0.25	0.55	21.56	23.57	16.46
<i>Non-Dense Plastic</i>	<i>1.28</i>	<i>1.08</i>	<i>1.69</i>	<i>1.26</i>	<i>2.16</i>	<i>0.36</i>	<i>19.86</i>	<i>16.78</i>	<i>27.70</i>
Dense Plastic Outputs % Comp	Mixed Plastic Bottles			PET Clear			PET Coloured		
	All	Type 1	Type 2	All	Type 1	Type 2	All	Type 1	Type 2
Clear PET	33.72	34.74	31.70	92.53	86.94	98.12	58.46	58.46	-
Col PET	7.62	7.74	7.37	2.42	4.14	0.70	33.42	33.42	-
Col HDPE	11.88	8.92	17.73	0.16	0.30	0.01	0.45	0.45	-
Nat HDPE	32.01	32.61	30.82	0.05	0.07	0.03	1.08	1.08	-
Oth Bottles	2.93	3.40	2.02	0.34	0.42	0.26	0.90	0.90	-
Oth Dense Plastic	5.85	5.71	6.13	3.10	6.17	0.04	2.96	2.96	-
<i>Non-Dense Plastic</i>	<i>5.99</i>	<i>6.88</i>	<i>4.25</i>	<i>1.40</i>	<i>1.97</i>	<i>0.84</i>	<i>2.72</i>	<i>2.72</i>	-

Figure 6 Composition of can based outputs showing mix of metal categories with non-metal materials grouped

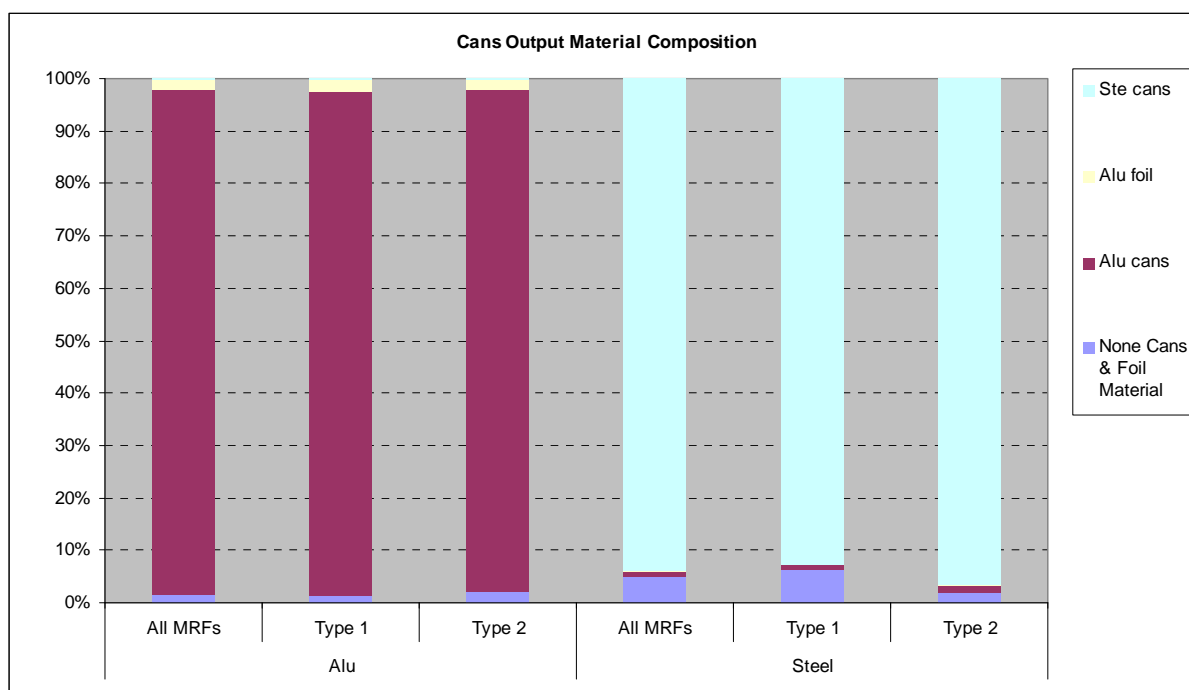


Figure 7 Composition of paper and card based outputs showing mix of paper and card categories with non-paper and card materials grouped


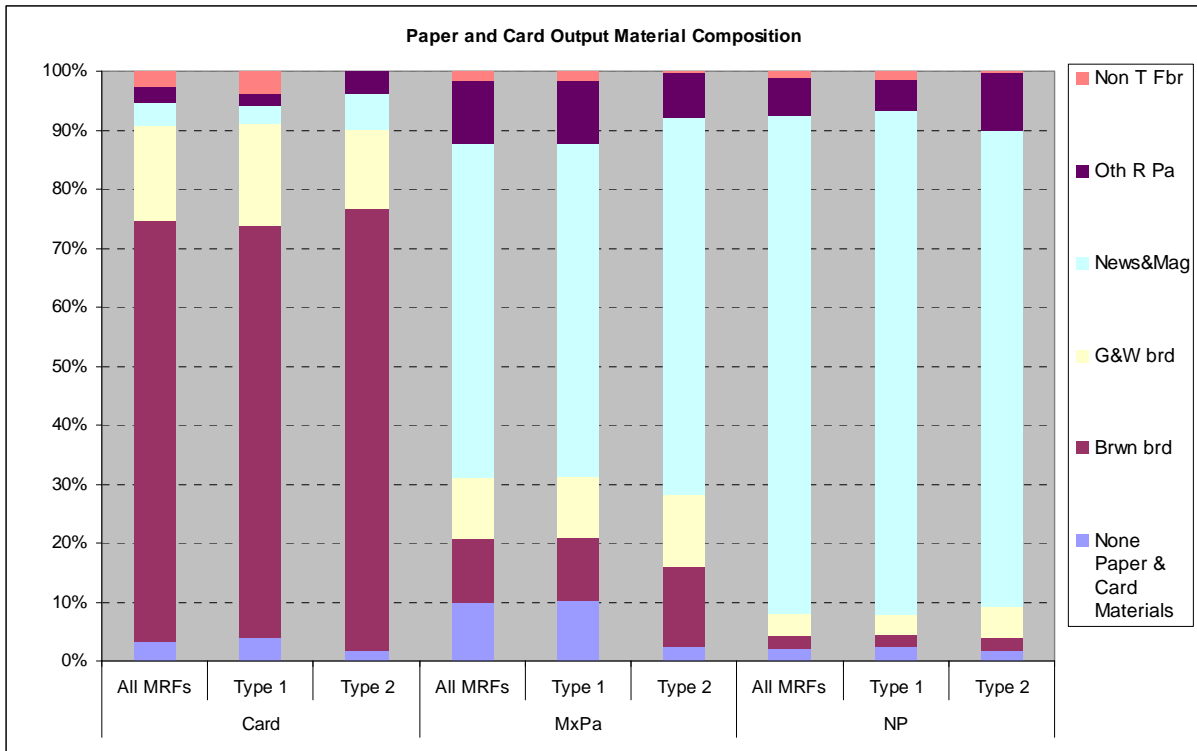


Figure 8 Composition of dense plastic based outputs showing mix of dense plastic categories with non-dense plastic materials grouped

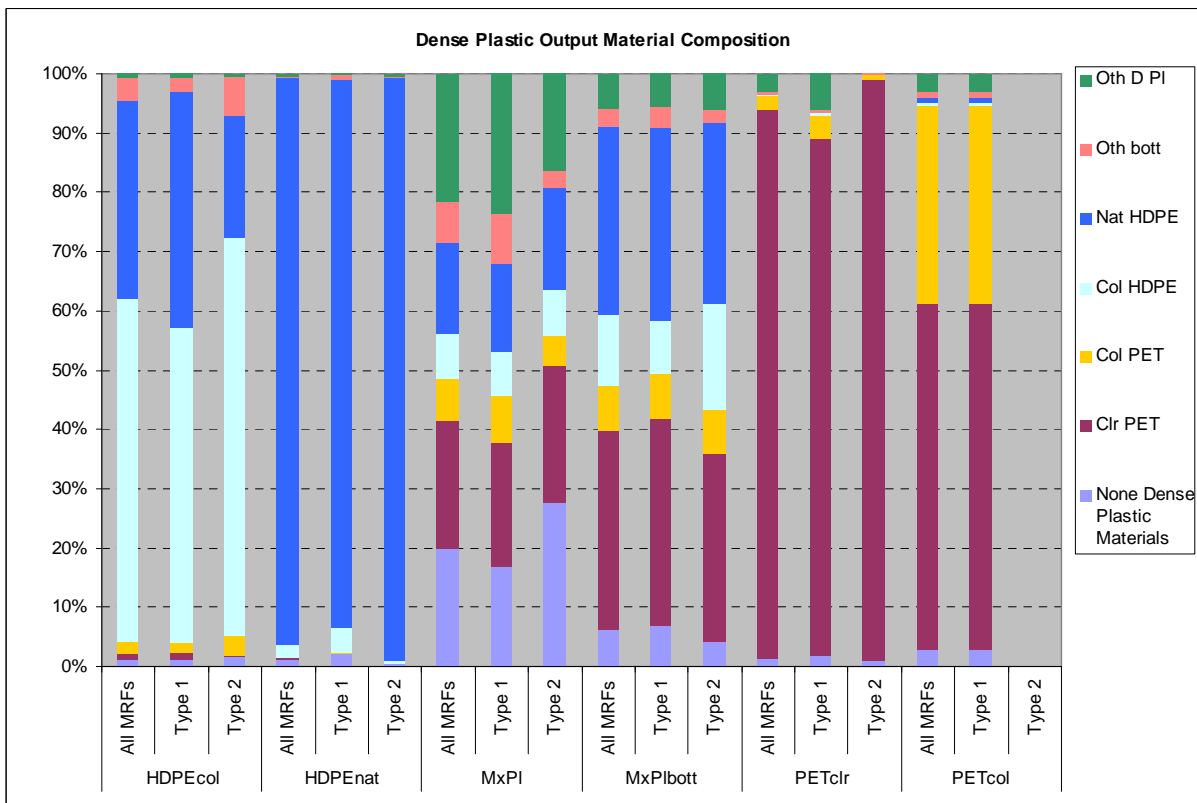

5.0 MRF contamination ranges

The main requirement of this project was to understand the quality of material received at MRFs (input material) and material leaving MRFs and sent to reprocessors (MRF outputs). For this we needed to define the level of contamination that was in each material stream. As mentioned earlier there is a broad consistency over the detailed definition of the contents of a material stream but there are some variations in what is accepted. For example for some MRFs aluminium foil was considered a contaminant in aluminium cans.

There are two ways that the contamination was analysed: across all individual samples taken in the project and across each MRF. Naturally the number of samples is very high and so gives a large sample size compared with the 18 individual MRF figures, however it also exposes the analysis to a higher bias when one MRF has a particular characteristic. It also exposes maximum and minimum limits to the extremes of individual samples.

For example the maximum contamination in an aluminium sample across all 524 samples was 25.6% but the largest average MRF contamination for aluminium over the 18 MRFs was 2.5%. This clearly shows that a schedule of samples is needed to address quality and not just a programme of infrequent spot checks.

The analysis in this report focuses on the overall MRF data to give a better indication of what can be expected in ranges of performance for a MRF.

5.1 Overview of contamination levels

The level of variation in the quality of output materials between MRFs was significant. However this varied on a material basis. For example, just because the output quality of one output material was poor does not mean that all the output materials in the same MRF were also highly contaminated. The quality of some output materials was very good.

Table 9 shows the average contamination rate for all the material streams. Residual is shown to have the most contamination but that would be expected. In fact 54.8% contamination does mean that there is potentially 45.2% targeted material not recovered by the MRF. However the actual tonnage of residual waste in relation to MRF throughput is small and much of it is small particle size and recovery by manual picking would be difficult i.e. ripped paper.

Table 9 All MRF average contamination rates (%)

Target Material	N	Min %	Max %	Mean %	Standard Deviation
Alu	18	0.0	8.1	2.5	2.3
Card	12	1.9	57.4	12.0	14.8
Glass	1	1.5	1.5	1.5	.
HDPEcol	3	3.3	12.2	8.7	4.7
HDPEnat	6	0.8	14.6	4.5	5.1
Input ²	18	5.7	22.7	12.9	6.0
MxPa	9	2.1	36.7	15.8	12.1
MxPIbott	8	0.5	23.0	12.2	7.9
MxPI	8	0.6	43.5	18.2	15.1
NP	12	1.9	22.0	9.8	6.4
PETclr	4	0.5	20.1	7.5	8.7
PETcol	2	3.0	13.2	8.1	7.2
PIFlm	1	39.5	39.5	39.5	.
Res ³	18	9.1	100.0	54.8	31.1
Steel	18	0.4	23.8	6.2	5.6

^{2,3} The input and residual analysis in this table combines the two input streams for twin-stream Type 2 MRFs

The lowest levels of contamination across all samples were in aluminium cans at 2.5% on average. The low contamination level in aluminium is thought to be driven primarily by the significant higher aluminium revenue and purity requirements specified by the reprocessor. In most cases this justifies the additional investment in further quality control procedures.

The greatest level of contamination in output materials was found in the plastic film 39.5%, mixed plastic 18.2% and mixed paper 15.8%. Cross contamination was evident within most MRFs where materials targeted were recovered in other output materials.

An indication of the likely main contaminants for the main output materials sampled is provided below:

- input - miscellaneous >45mm, glass and other dense plastic;
- aluminium - other dense plastic, miscellaneous <45mm, aluminium foil;
- card – non-target fibre, other dense plastic, plastic film;
- HDPE natural – coloured HDPE, other dense plastic, miscellaneous <45mm;
- mixed paper - miscellaneous <45mm and >45mm material, beverage cartons, brown board;
- mixed bottles – other dense plastic >45mm miscellaneous material, plastic film;
- mixed plastic - miscellaneous <45mm material, newspaper and magazines, grey and white board;
- news and PAM – brown board, grey and white board, non-target fibre;
- steel - miscellaneous <45mm material, aluminium cans, plastic film; and
- residual – other dense plastic, textiles, plastic film, miscellaneous <45mm and >45mm material.

5.2 Material stream contamination benchmarking

The analysis in this section focuses on the range of contamination that is found in each stream. The contamination range is defined by looking across the 18 MRFs at the:

- minimum, this is the lowest contamination rate the survey found;
- 25th percentile bound, meaning that one quarter of the MRF contamination was at this level or below;
- mean, being the average contamination rate across the sample;
- 75th percentile bound, meaning that one quarter of the MRF contamination was at this level or higher; and
- maximum, this is the highest contamination rate the survey found.

So when looking at benchmarking the tables in each subsequent section will allow a MRF that performs its own analysis to benchmark itself within one of six ranges formed by the factors described above. This is not the same as statistical 95% upper and lower bound confidence intervals.

5.2.1 Input material contamination


The contamination of the input materials is broken out in Table 10 and represented graphically in Figure 9. The numbers have been split into the full set of 18 MRFs, the 13 Type 1 MRFs and the 5 Type 2. The twin-stream Type 2 MRFs have two distinct input streams and so for quality analysis these are separated out. The two main streams are the containers such as plastic bottles and cans and the fibres such as paper and card.

Table 10 Percentage contamination in input material across 18 MRFs

Material	MRF Type	Max %	75 th Perc	Mean %	25 th Perc	Min %
Input	Full Data	28.61	17.48	12.00	6.37	0.79
Input	Type 1 MRFs	22.54	17.48	13.10	8.37	5.72
Input (container)	Type 2 MRFs	28.61	22.64	13.35	4.85	0.79
Input (fibre)	Type 2 MRFs	9.00	9.00	6.74	2.86	2.08

The analysis of the individual samples showed there is a statistical significant difference in the contamination rates between the two types of MRF. Overall the figures show the level of contamination from the twin-stream co-mingled input samples was marginally lower than those from single-stream input samples. This may reflect households more diligent consideration of what materials can go into the recycling bin during the initial segregation into fibres and containers, or it may simply be a function of less targeted materials being in each group.

Figure 9 Percentage contamination of input materials stream

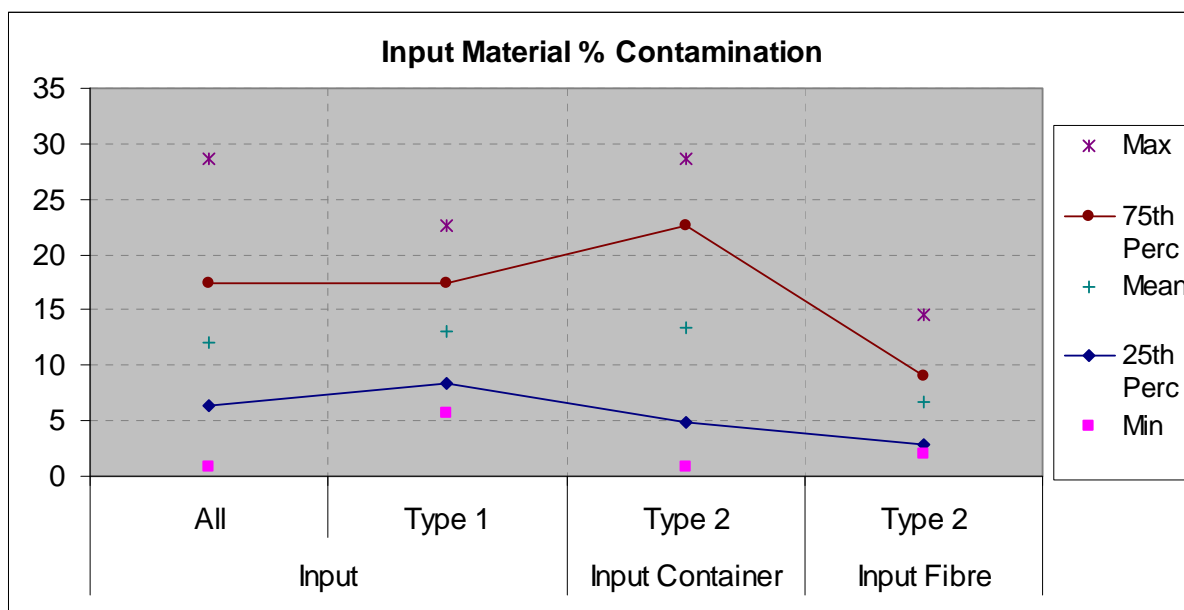

Any MRF with an input contamination rate between the two lines on Figure 9 would be in the central 50% of MRFs within the analysis of this project.

5.2.2 Residual material contamination

The contamination of the residual materials is broken out in Table 11 and represented graphically in Figure 10. The numbers have been split into the full set of 18 MRFs, the 13 Type 1 MRFs and the 5 Type 2. The twin-stream Type 2 MRFs have two distinct input streams and so for quality analysis these are separated out. The two main streams are the containers such as plastic bottles and cans and the fibres such as paper and card.


It is key to note that the contamination in residual material (i.e. materials not targeted by the MRF) should be read as good when high, this means the targeted materials are removed into the output streams and contaminating material continue through into the residual waste.

Table 11 Percentage contamination in residual material across 18 MRFs

Material	MRF Type	Max %	75 th Perc	Mean %	25 th Perc	Min %
Residual	Full Data	100.00	80.91	54.60	28.33	9.09
Residual	Type 1 MRFs	100.00	61.70	48.99	24.70	9.09
Res (container)	Type 2 MRFs	99.95	87.99	72.60	72.23	25.55
Res (fibre)	Type 2 MRFs	80.91	59.24	48.94	32.95	29.33

The analysis shows that twin-stream Type 2 MRFs seem to allow more targeted material through in the fibre stream and less in the container stream than single-stream Type 1 MRFs. Figure 10 very clearly shows that the performance from the fibre stream of a twin-stream Type 2 MRF type is much better and more consistent. Single-stream Type 1 MRF types have a wider range of contamination levels, but also process a wider mix of materials within the same process.

Figure 10 Percentage contamination of residual materials stream

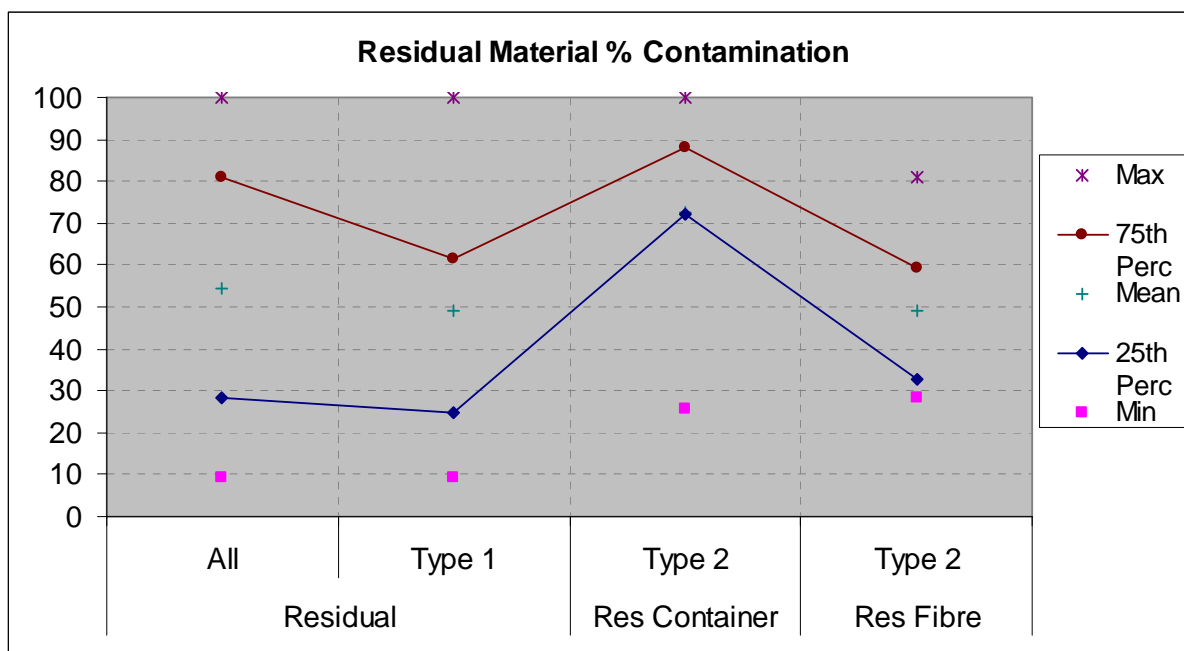

Any MRF with a residual contamination rate between the two lines on Figure 10 would be in the central 50% of MRFs within the analysis of this project.

5.2.3 Output material contamination

The contamination of the output materials is considered in the same three groups as the composition. These groups are can based, paper and card based and plastic based. Each group is given its own analysis section below.

Can based outputs


The contamination of can based output streams is shown in Table 12 and represented graphically in Figure 11. As discussed in the compositional section the aluminium stream commands a strong market value and so is sorted very carefully. This is born out by aluminium having the lowest average contamination but also a very narrow band of performance across the sampled MRFs.

Table 12 Percentage contamination in can based output material across 18 MRFs

Material	MRF Type	Max %	75 th Perc	Mean %	25 th Perc	Min %
Aluminium	Full Data	8.04	4.59	2.53	0.88	0
	Type 1 MRFs	8.04	2.45	2.13	0.84	0
	Type 2 MRFs	5.78	5.22	3.58	1.00	0.84
Steel	Full Data	23.78	7.14	6.24	2.82	0.35
	Type 1 MRFs	23.78	8.98	7.36	2.83	2.34
	Type 2 MRFs	5.32	4.92	3.33	2.80	0.35

Steel cans have a slightly higher average contamination but a much wider band of performance. As discussed in the composition section, this could be due to the separation process and the position in which steel is often recovered in the overall MRF process.

Figure 11 Percentage contamination of can based materials stream

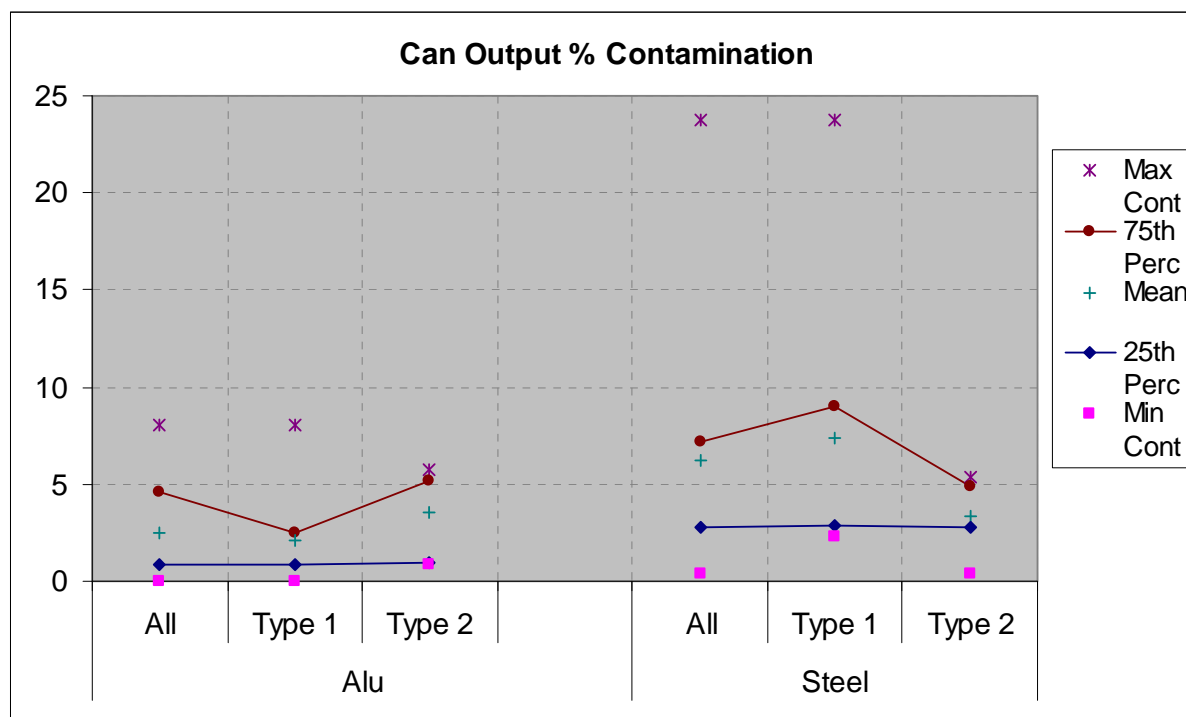

Any MRF with a contamination rate between the two lines on Figure 11 would be in the central 50% of MRFs within the analysis of this project.

Paper and card based outputs

The contamination of paper and card based output streams is shown in Table 13 and represented graphically in Figure 12.

This suggests that twin-stream Type 2 MRFs produced a higher quality card output than single-stream Type 1 MRFs, but this may be more due to how the data was collected i.e. full sort or training MRF. These figures should be interpreted with some caution as the approach to collecting card varied greatly between MRFs, although typically oversized material was removed at the pre sort stage. Lower levels of contamination in the twin-stream MRF would be expected as the risk of contamination from non-fibre materials is less as a result of the card being collected and then processed with the paper input and not the container input.

For mixed paper no real comparison can be drawn between the types of MRF as there was only one twin-stream Type 2 MRF in the study with a mixed paper output for which only a small number of samples were taken. However this one twin-stream Type 2 MRF did show a significantly higher quality of mixed paper.

News and PAMs average contamination rates are very similar across the two MRF types. There is though greater consistency on the twin-stream Type 2 MRFs shown by a slightly narrower middle percentile bounds (performance range) and even narrower max and min range (shown graphically on Figure 12). This could be due to the separation in the two-streams at the householder although the best (lowest) reported level of contamination was from a single-stream Type 1 MRF.


Although similar levels of minimum contamination can be achieved from mixed paper as News and PAM, on average the mixed paper is more contaminated than the News and PAM. Whilst the News and PAM output has a higher market value the differential was not significant during the time of the survey. More likely the difference in contamination between the two outputs is thought to be caused by the different approaches within a MRF to recovering these materials. News and PAM is often positively picked from the process i.e. removing the targeted material off the conveyor, whereas mixed paper is often negatively picked from the process i.e. leaving the targeted material on the conveyor and removing the contaminating materials. Therefore, there is a greater risk of contamination in the mixed paper output. A point of interest is that due to the market price differential between paper grades during the time of the survey, in some cases News and PAM and mixed paper were not being

collected separately and all paper material consigned as mixed paper and would therefore contain a higher proportion of newspaper and magazines.

Table 13 Percentage contamination in paper and card based output material across 18 MRFs

Material	MRF Type	Max %	75 th Perc	Mean %	25 th Perc	Min %
Card	Full Data	57.38	12.00	11.97	4.82	1.90
	Type 1 MRFs	57.38	9.07	13.01	4.97	3.77
	Type 2 MRFs	12.92	12.31	8.84	6.80	1.90
Mixed Paper	Full Data	36.70	25.34	15.80	3.20	2.10
	Type 1 MRFs	36.70	25.52	17.45	9.83	2.10
	Type 2 MRFs	2.58	2.58	2.58	2.58	2.58
News and PAMs	Full Data	21.97	15.05	9.79	4.62	1.86
	Type 1 MRFs	21.97	14.71	9.49	4.72	1.86
	Type 2 MRFs	16.07	13.87	10.68	7.98	4.30

Figure 12 Percentage contamination of paper and card based materials stream

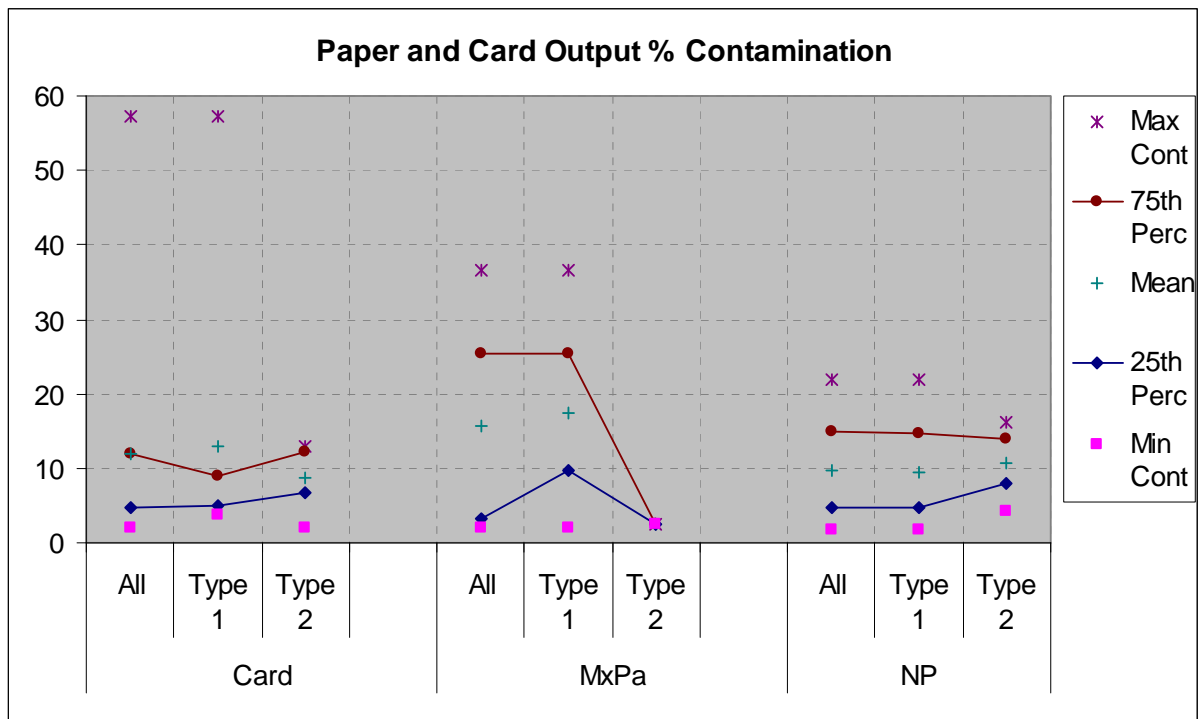

Any MRF with a contamination rate between the two lines on Figure 12 would be in the central 50% of MRFs within the analysis of this project.

Dense plastic based outputs

The contamination of dense plastic based output streams is shown in Table 14 and represented graphically in Figure 13.

For coloured HDPE the analysis comparing the two MRF types is limited as there were only two single-stream Type 1 and one twin-stream Type 2 MRFs in the data. The main statistical analysis did indicate that the differences reported between the two MRF types, across individual samples, was not statistically relevant.

Overall natural HDPE shows the lowest mean contamination of all the plastic materials. For natural HDPE the difference between the average contamination for single-stream Type 1 MRF and the twin-stream Type 2 MRF was shown to be statistically significant: the Type 2 MRFs generating much lower levels of contamination. As

Figure 13 clearly shows, twin-stream Type 2 MRF also have a narrow range of performance. The high value of natural HDPE in the market seems to force investment in good separation practice, positively picking these materials.

For mixed plastic the single-stream MRF seems to produce a higher average quality of output that was found to be statistically significant: however there is a much wider performance range. The twin-stream Type 2 MRFs whilst with a higher level of average contamination were much more consistent in the level of contamination achieved, shown by a narrower performance range.

For mixed plastic bottles there is very little difference in the average contamination. Although for the individual sample analysis this was shown to be statistically significant: but this was thought to be driven by one MRF having unusually low contamination levels. On comparison of contamination quartile range in Figure 13 shows single-stream Type 1 MRFs have a similar spread of extremes but a narrow middle band.

The level of contamination in Clear PET in the twin-stream Type 2 MRFs is lower than single-stream Type 1 MRFs in both the average level of contamination and the upper and lower quartile range. This difference was shown to be statistically significant.


Coloured PET was not processed as an output material at any of the twin-stream Type 2 MRFs in the study. The contamination at single-stream Type 1 MRFs for coloured PET and all the non-mixed output streams does seem to be similar as illustrated in Figure 13.

As noted in the composition section of this report, the quality of the different plastic outputs varies which appears to be driven by the market value i.e. higher for clear PET and natural HDPE, and then the associated process to recover the plastic outputs within the MRF.

Table 14 Percentage contamination in dense plastic based output material across 18 MRFs

Material	MRF Type	Max %	75 th Perc	Mean %	25 th Perc	Min %
Coloured HDPE	Full Data	12.33	11.34	8.66	6.88	3.32
	Type 1 MRFs	10.44	8.66	6.88	5.10	3.32
	Type 2 MRFs	12.23	12.23	12.23	12.23	12.23
Natural HDPE	Full Data	14.59	3.98	4.55	1.85	0.75
	Type 1 MRFs	14.59	9.29	7.50	3.96	3.93
	Type 2 MRFs	2.34	2.02	1.59	1.22	0.75
Mixed Plastic	Full Data	43.55	26.59	18.21	6.88	0.56
	Type 1 MRFs	43.55	21.24	15.05	4.85	0.56
	Type 2 MRFs	29.92	28.81	27.70	26.59	25.48
Mixed Plastic Bottles	Full Data	23.04	16.16	12.21	8.34	0.47
	Type 1 MRFs	23.04	14.30	12.40	10.03	3.26
	Type 2 MRFs	21.72	17.61	11.89	6.98	0.47
Clear PET	Full Data	20.14	9.52	7.47	2.56	0.53
	Type 1 MRFs	20.14	16.60	13.06	9.52	5.98
	Type 2 MRFs	3.24	2.56	1.89	1.21	0.53
Coloured PET	Full Data	13.24	10.68	8.13	5.57	3.01
	Type 1 MRFs	13.24	10.68	8.13	5.57	3.01
	Type 2 MRFs	No MRF data				

Figure 13 Percentage contamination of dense plastic based materials stream

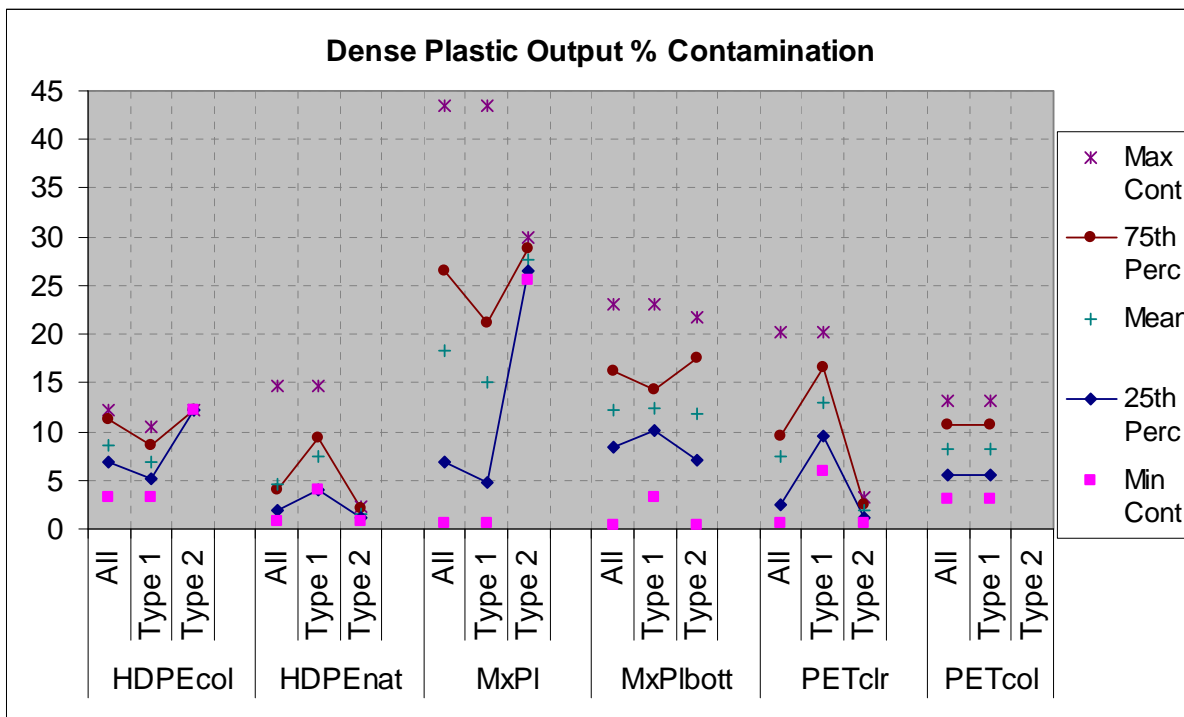

Any MRF with a contamination rate between the two lines on Figure 13 would be in the central 50% of MRFs within the analysis of this project.

6.0 Updated sampling regimes

One of the key practical conclusions from this project is that the level of sampling originally specified was very intensive for the training MRFs. Often the level of resource required to hand sort the specified weight and number of samples in the original protocol was beyond the level of resource available. Of particular interest was the implication of trying to achieve the minimum sample weight for input material at twin-stream Type 2 MRFs that did not contain paper. This increased further the resource demands on the MRF operators to hand sort this material in terms of sorting time, space, manpower and equipment due to the additional volume of material that was required.

This project used the WRAP MRF sampling protocol document³ for the sample sizes. These are provided in Table 15 below. A revised data set of minimum sample sizes and minimum sample weights has been produced to reflect the data collected during the MRF11 study and the practicalities of sampling and ensuring that ongoing sampling where possible is less resource intensive. The revised sample sizes are provided in Table 16.

³ Report on the conclusion of Phase 2: practical field trials of material sorting and sampling techniques (WRAP April 2008)

Table 15 WRAP MRF protocol minimum sample number and weights

Material Stream	Number of Samples	Minimum Sample Weight (kg)
Input Material	40	95
Output Material		
News and PAMs	40	70
Mixed Paper	40	70
Aluminium Cans	30	25
Steel Cans	30	40
Clear PET Bottles	30	25
Mixed Plastic	50	30
Natural HDPE Containers	30	25
Residual Material	10	30

The figures in Table 16 are intended as a 'starting point' for MRF operators and any future similar study to assist the sample plan design. However, one of the main conclusions from this project is that there is a significant variability in the quality of the same outputs between MRFs due to local operational and economic factors. Therefore, ongoing sample sizes at a MRF should be based only on the composition and associated variability of samples collected at the MRF and not on a generic table that accommodates the variability across various MRF designs achieving varying levels of performance. The sample size required for each output will be a direct function on the consistency of a specific material at a MRF. In some MRFs the sample size will be high and in others it will be low. Clearly this will affect the resource commitment required by the MRF. It is also important to stress that the required sample size is based on variability and not the level of quality achieved. For example, if samples within a MRF consistently have a high level of contamination then a smaller sample size could be required in comparison to a MRF where on average the level of contamination is a lot lower but the variability around this average is greater.

Within this project, there was no requirement to measure the weight and number of particles within each sample. Therefore, it is not possible to derive a revised minimum sample weight. Instead, a minimum sample weight has been based on the average weight of samples taken for each stream. This is because the measured variability and confidence levels will be influenced by the weight of material sampled.

Based on this weight, a view has been taken on the appropriate number of samples required to achieve an acceptable level of precision at a 95% confidence level. This means that if the number and weight of samples specified were sorted again you would be 95% confident that the values would be within the specified percentage of the mean. Clearly it is important to try and achieve as narrow a band of precision (i.e. be as accurate) as possible.

The narrowest band of precision (and the associated number of samples required to achieve this) has been selected considering:

- the length of time to sort the samples and hence resource requirements on the MRF operators. For example a required sample size of 491 samples to achieve 10% level of precision for aluminium is not practical; and
- the actual mean contamination value reported across the 18 MRFs sampled. For example whilst a figure of +/- 50% around the mean for aluminium appears high, the mean in some MRFs is as low as 0.1%. Therefore the 95% confidence range will be between 0.05% and 0.15%.

Table 16 WRAP MRF protocol minimum sample number and weights *

Material Stream	Number of Samples	Minimum Sample Weight (kg)	Estimated +/- % around the mean with 95% Confidence
Input Material (Single-stream)	20	100	+/- 20%
Input Material (Twin-stream with paper)	30	100	+/- 20%
Input Material (Twin-stream without paper)	25	100	+/- 20%
Output Material			
Aluminium	20	30	+/- 50%
Card	40	70	+/- 20%
Mixed Paper	25	80	+/- 25%
Mixed Plastic	25	35	+/- 20%
Mixed Plastic Bottles	25	35	+/- 20%
HDPE Coloured Plastic Bottles	35	30	+/- 30%
HDPE Natural Plastic Bottles	30	30	+/- 30%
News and PAM	35	85	+/- 20%
PET Clear	25	30	+/- 25%
PET Coloured	20	30	+/- 50%
Steel	20	45	+/- 25%
Residual Material	10	35	+/- 25%

[*The sample numbers have been rounded up or down to the nearest 5]

7.0 Conclusions

During this project around 270 tonnes of material was hand sorted from 18 MRF across the UK. There is a significant quantity of data contained within this report where a number of different conclusions can be drawn. These have been discussed within the report in the relevant sections. Each of these conclusions should be considered within the context of the data limitations outlined within the report and the number of MRF sampled and approach taken. A number of statistical relationships have been identified, but these should be interpreted with caution due to the potential inter-relationship between these. In many cases there are a range of factors that appear to correlate with material quality which cannot be accounted for in the same analysis and therefore a triangulated approach is required to take an informed view of the actual factors causing this change.

This section outlines the key conclusions of this project, drawn from the report, and listed below:

- The average contamination of the material streams varied significantly.

Table 17 All MRF average contamination rates (%)

Target Material	N	Min %	Max %	Mean %	Standard Deviation
Alu	18	0.0	8.1	2.5	2.3
Card	12	1.9	57.4	12.0	14.8
Glass	1	1.5	1.5	1.5	.
HDPEcol	3	3.3	12.2	8.7	4.7
HDPEnat	6	0.8	14.6	4.5	5.1
Input ⁴	18	5.7	22.7	12.9	6.0
MxPa	9	2.1	36.7	15.8	12.1
MxPlbott	8	0.5	23.0	12.2	7.9
MxPl	8	0.6	43.5	18.2	15.1
NP	12	1.9	22.0	9.8	6.4
PETclr	4	0.5	20.1	7.5	8.7
PETcol	2	3.0	13.2	8.1	7.2
PIFlm	1	39.5	39.5	39.5	.
Res ⁵	18	9.1	100.0	54.8	31.1
Steel	18	0.4	23.8	6.2	5.6

- Input contamination for Type 1 MRFs and container based input on Type 2 have a similar mean (13.1% and 13.35%), but Type 2 container has a wider range between maximum and minimum. Type 2 fibre based input has a lower mean (6.74%) and a narrow range.
- Residual contamination for Type 1 MRFs and fibre based residual on Type 2 have a similar mean (48.99% and 48.94%), but Type 2 fibre has a narrower range. Type 2 container based residual has a higher mean (72.6%). For residual contamination is good, as this means Type 2 container based lines allowed less targeted material through into the input.
- Steel cans had a similar minimum contamination to aluminium cans (0.35% and 0%), but a much higher maximum (23.78% and 8.04%).
- Of the paper based outputs, News and PAMs has the lowest mean contamination (9.79%) then card (11.97%) and then mixed paper (15.8%). One card MRF had a particularly high contamination rate.
- For plastic based outputs the mixed plastic (18.21%) and mixed bottles (12.21%) showed the highest level of contamination. The lowest was natural HDPE (4.55%). Coloured HDPE (8.66%), Clear PET (7.47%) and coloured PET (8.13%) had similar mean contaminations. The highest range of contamination was not surprisingly on mixed plastics.

The following conclusions are pulled from the technical data report, and so the figures are based on the analysis of the 4,676 individual samples unless otherwise stated.

- Input contamination across all MRFs sampled varied significantly between 6% and 23%.
- Newspaper and Magazines is the dominant material in nearly all MRFs sampled. Whilst all MRFs sampled accepted aluminium, steel, PET and HDPE bottles, acceptance of other materials varied. Some materials were tolerated at the MRF for a variety of reasons specific to local circumstances on the assumption that the material would be removed and be contained in the residual material. Conversely, some materials not targeted in the inputs, but were 'targeted' into output materials i.e. some materials were present in sufficient

^{4.5} The input and residual analysis in this table combines the two input streams for twin-stream Type 2 MRFs

quantities to remove as a marketable product (or to avoid the disposal cost), but they did not want to encourage this material into the process.

- Whilst no clear conclusion between a MRF configuration and material quality can be made some relationships were observed. It was observed that where the priority for a particular output was high purity levels (for a range of reasons) that these levels could be achieved. These observations support the view that in most cases a MRF can achieve lower contamination levels if local operational or market conditions require it. Where residual contaminants were only positively removed by hand from the picking line and the residual output was not the last point in the MRF configuration, the last output material showed higher levels of contamination than similar output materials that were positively picked.
- The composition of each output material was predominantly the appropriate targeted material. The percentage assay of the two main material categories for the main output materials sampled are provided below:
 - aluminium (96.3% aluminium cans; 2.0% aluminium foil);
 - card (71.4% brown board; 16.1% grey and white board);
 - HDPE natural (95.5% natural HDPE; 2.4% coloured HDPE);
 - mixed paper (56.6% newspaper and magazines; 10.8% brown board);
 - mixed bottles (33.7% clear PET; 32% natural HDPE);
 - mixed plastic (21.6% clear PET; 21.6% other dense plastic);
 - news and PAM (84.5% newspaper and magazines; 6.2% other recyclable paper); and
 - steel (93.9% steel cans; 1.1% miscellaneous <45mm).
- The level of variation in the quality of output materials between MRF is significant. However this varies on a material basis. For example, just because the output quality of one output material is poor does not mean that all the output materials in the same MRF are also highly contaminated. The quality of some output materials was very good. Based on all 524 samples of aluminium cans, this output showed one of lowest levels of contamination at 2.4% on average; with a variation between samples indicated by a 95% confidence interval of $\pm 0.3\%$ (12% of the Mean). Two MRF declared 100% pure aluminium samples; and other MRFs also showed <1% contamination. The average output contamination for aluminium output samples between the 18 MRFs was 2.5% (Standard Deviation of 2.3%). Aluminium is a high value material and it is economically viable to invest in additional quality control procedures to ensure that high purity levels are achieved.
- Based on the individual samples, the greatest level of contamination was found in the mixed plastic and mixed paper outputs with 19.9% and 16.9% respectively. The lowest levels of contamination were found in the aluminium and HDPE natural bottles with levels less than 5% achieving 2.4% and 4.5% respectively. The figures for glass and plastic film are not reliable as there was only one sampled stream for each.
- The materials identified as a contaminant varied between MRFs for the same output materials. Therefore, it is difficult to state with any certainty the main contaminating material for each output material. However, an indication of the likely main contaminant for the main output materials sampled is provided below:
 - input - miscellaneous >45mm, glass and other dense plastic;
 - aluminium - other dense plastic, miscellaneous <45mm, aluminium foil;
 - card – non-target fibre, other dense plastic, plastic film;
 - HDPE natural – coloured HDPE, other dense plastic, miscellaneous <45mm;
 - mixed paper - miscellaneous <45mm and >45mm material, beverage cartons, brown board;
 - mixed bottles – other dense plastic >45mm miscellaneous material, plastic film;
 - mixed plastic - miscellaneous <45mm material, newspaper and magazines, grey and white board;
 - news and PAM – brown board, grey and white board, non-target fibre;
 - steel - miscellaneous <45mm material, aluminium cans, plastic film; and
 - residual – other dense plastic, textiles, plastic film, miscellaneous <45mm and >45mm material.

The average proportion of residual material samples that is material targeted by MRFs i.e. missed and is collected in the residual waste is $46.0\% \pm 4.6\%$ (95% confidence interval) of the residual waste. The residual waste in single-stream Type 1 MRF contains a greater proportion of targeted material than twin-stream Type 2 MRF accounting for 49.3% in comparison to 38.1% of the residual waste total. Whilst this figure as a percentage assay appears high, this must be considered within the context of small quantities of residual waste leaving MRFs. A perfect operation would comprise of 0% targeted materials in the residual waste.

- Materials not targeted at the MRF do not necessarily continue to be recovered in the residual waste. However there appears to be no consistent output stream contaminated although some tentative comparisons can be made. However the flow of material through the MRF and the associated risk of contaminating the output vary between MRFs and specific to the MRF configuration, how that configuration is operated, the associated

local contract and material specifications trying to be achieved. In many cases, most of these variables can vary on daily or weekly basis, but almost certainly on a monthly basis.

- The contamination of card, coloured and natural HDPE, mixed plastics and mixed plastic bottles and Clear PET output materials did not show a statistically significant correlation with input contamination (Sig. >0.05), namely. Steel cans, aluminium cans, mixed paper, newspapers and magazines did show significant correlations (Sig. <0.05).
- For a large proportion of output materials (all outputs except newspapers and magazines and steel) twin-stream MRFs showed significantly lower level of cross-contamination as a proportion of the total contamination observed. Although having a twin-stream collection system will reduce the proportion of contamination caused by cross-contamination, cross-contamination rates can still be as high as observed for single-stream systems for some output materials.
- It is not possible to say conclusively that there is a statistical difference in the quality of output materials produced from a single-stream Type 1 MRF in comparison to a twin-stream Type 2 MRF. The quality of material will be dependent on local operating conditions and the range and type of materials targeted. However, there were some statistical differences between some materials where the quality in single-stream was better than twin-stream for some and others a higher output quality was achieved from the twin-stream MRF. This study concluded that:
 - the output material contamination rates were statistically lower in a single-stream MRF configuration for aluminium cans and mixed plastic;
 - card, natural HDPE, steel cans, clear PET showed a statistically lower level of contamination in a twin-stream MRF rather than a single-stream MRF;
 - no comparisons could be made for glass or plastic film, as only one MRF was sampled that produced that specific output; and
 - whilst some tentative relationships exist, the level of contamination for the other output materials did not show any statistical difference or it is not certain if the statistical difference is due to how the data is collected (i.e. Full sort or Training).
- Based on the limited responses from the questionnaire data those MRFs that regularly sampled materials were more able to monitor and control quality and thus produced higher quality materials (e.g. natural HDPE, clear PET and steel cans).
- Contamination thresholds imposed on local authorities by MRF operators had no significant effect on input quality as MRFs are reluctant to enforce any thresholds.
- Notwithstanding the limitations in the data, there are some tentative indications that threshold (limits) imposed on the output material contamination by the customer could have a positive effect on output quality of certain materials. Aluminium, card, mixed plastic and news and PAMs showed less mean contamination but mixed plastic, mixed plastic bottles and steel cans showed increased contamination.

There is a requirement for future sampling to become more robust within MRFs but a need to recognise the immense resource commitment in order to undertake the appropriate level of sampling / testing. A number of MRFs currently undertake their own quality assurance and material sampling, of which some is of a very high quality and at an appropriate level of detail. However for the MRFs who participated in this study as a data MRF i.e. they undertake their monitoring and therefore did not require sampling, the quantity and quality of data was poor.

In most cases only tonnage information was provided which could not be used to assess the quality of output materials. Where composition data was provided it was inconsistent, infrequent, small sample size and a limited number of material classifications were used.

There was no standard approach between MRFs however it is worth noting that whilst there are some concerns on the quality and quantity of ongoing monitoring, the alternative approach adopted within this project is resource intensive and unlikely to be sustainable at this level over a long period of time. Therefore it is essential that local monitoring is started using the standard approach (outlined in the WRAP training and sampling plan) as a baseline. Going forward the sample size and frequencies should be based on an individual MRF data and the associated variation within the MRF. As the material quality and variability in this material quality improves, the required sample size and weight of samples required to achieve the same level of statistical confidence will reduce along with the resource commitment to undertake the sampling.

Appendix 1: Abbreviations

Table A1.1 Waste composition material category abbreviations

Abbreviation	Description
News & Mag	Newspaper and Magazines
Brwn brd	Brown Board
G&W brd	Grey and White Board
Oth R Pa	Other Recyclable Paper
NonT Fbr	Non-Target Fibre
Clr PET	Clear PET Bottles
Col PET	Coloured PET Bottles
Nat HDPE	Natural HDPE Bottles
Col HDPE	Coloured HDPE Bottles
Oth bott	Other Bottles
Oth D Pl	Other Dense Plastic
Pl film	Plastic Film
Alu cans	Aluminium Cans
Ste cans	Steel Cans
Alu foil	Aluminium Foil
Textiles	Textiles
BevC	Beverage cartons
Glass	Glass
Misc >45	Miscellaneous material remaining on top of the 45mm mesh screen
Misc <45	Miscellaneous material falling through the 45mm mesh screen

Table A1.2 Targeted material category abbreviations

Abbreviation	Description
Alu	Aluminium
Card	Cardboard
Glass	Glass
Input	Input
MxPa	Mixed Paper
MxPl	Mixed Plastic
MxPlbott	Mixed Plastic Bottles
HDPEnat	Natural HDPE
HDPEcol	Coloured HDPE
NP	News and PAMs
PETclr	Clear PET
PETcol	Coloured PET
PlFilm	Plastic Film
Res	Residual
Steel	Steel

Appendix 2: Composition tables

Table A2.1 All MRF input, output materials and residual material composition (%)

Material	Input	Res	Alu	Card	Glass	HDPE col	HDPE nat	Mx Pa	Mx PI	Mx PI bott	NP	PET clr	PET col	PI Flm	Steel
Alu cans	3.790	1.619	96.289	0.135	0.034	0.034	0.033	0.449	1.875	0.208	0.062	0.042	0.131	0.423	0.837
Alu foil	0.241	0.497	1.981	0.013	0.317	0.006	0.001	0.026	0.371	0.013	0.008	0.006	0.020	0.100	0.121
Brwn brd	7.728	3.715	0.026	71.351	0.000	0.004	0.022	10.764	0.750	0.160	2.129	0.003	0.009	0.812	0.244
Clr PET	6.552	2.612	0.029	0.097	0.000	0.818	0.044	0.570	21.605	33.719	0.078	92.531	58.463	7.670	0.153
Col HDPE	2.653	1.133	0.027	0.085	0.000	57.729	2.443	0.102	7.537	11.878	0.016	0.155	0.448	0.598	0.061
Col PET	1.297	1.338	0.012	0.013	0.000	2.219	0.075	0.208	7.109	7.617	0.016	2.420	33.418	0.679	0.059
G&W brd	6.844	4.770	0.070	16.115	0.014	0.048	0.087	10.454	1.963	0.415	3.674	0.097	0.373	1.188	0.416
Glass	2.450	5.350	0.012	0.007	98.530	0.000	0.000	0.422	0.885	0.151	0.021	0.000	0.000	0.000	0.012
Misc <45	2.897	9.248	0.231	0.884	0.000	0.446	0.355	3.174	3.114	2.024	0.747	0.622	0.643	1.358	1.063
Misc >45	2.196	8.569	0.295	0.300	0.402	0.307	0.242	1.012	1.390	0.762	0.289	0.271	0.005	0.636	0.517
Nat HDPE	6.026	1.568	0.034	0.096	0.000	33.574	95.450	0.402	15.389	32.009	0.087	0.046	1.084	6.934	0.127
News & Mag	31.698	13.512	0.110	3.898	0.069	0.032	0.033	56.639	1.912	0.318	84.535	0.004	0.006	2.669	0.411
Non-T Fbr	1.314	3.181	0.025	2.689	0.021	0.005	0.009	1.704	0.760	0.103	1.227	0.001	0.150	0.171	0.270
Oth D PI	3.794	15.542	0.342	0.601	0.306	0.685	0.403	0.823	21.562	5.851	0.266	3.102	2.963	13.589	0.583
Oth R Pa	5.105	5.178	0.041	2.620	0.304	0.050	0.170	10.488	1.668	0.238	6.223	0.106	0.748	1.642	0.247
Oth bott	0.756	0.630	0.005	0.084	0.000	3.692	0.327	0.119	6.934	2.933	0.022	0.343	0.903	0.118	0.082
PI film	2.208	8.036	0.190	0.501	0.004	0.196	0.243	0.681	2.989	1.347	0.288	0.201	0.583	60.546	0.745
Ste cans	11.230	1.905	0.251	0.147	0.000	0.149	0.056	0.746	1.186	0.133	0.123	0.046	0.038	0.752	93.926
Bev cartons	0.669	0.758	0.027	0.318	0.000	0.005	0.008	1.136	0.725	0.097	0.138	0.004	0.016	0.061	0.095
Textiles	0.553	10.839	0.004	0.047	0.000	0.001	0.000	0.083	0.275	0.024	0.048	0.000	0.000	0.053	0.030

Table A2.2 Single-stream MRF input, output materials and residual material composition (%)

Material	Input	Res	Alu	Card	Glass	HDPE col	HDPE nat	Mx Pa	Mx PI	Mx PI bott	NP	PET clr	PET col	PI Flm	Steel
Alu cans	2.095	1.042	96.468	0.189	0.034	0.031	0.039	0.463	0.919	0.307	0.077	0.058	0.131	0.423	0.670
Alu foil	0.210	0.283	1.981	0.018	0.317	0.010	0.000	0.027	0.422	0.010	0.010	0.002	0.020	0.100	0.131
Brwn brd	8.356	4.454	0.036	69.827	0.000	0.006	0.043	10.670	0.974	0.221	2.039	0.006	0.009	0.812	0.343
Clr PET	3.997	2.543	0.033	0.131	0.000	1.144	0.064	0.587	21.033	34.742	0.097	86.941	58.463	7.670	0.159
Col HDPE	1.531	0.801	0.016	0.116	0.000	53.185	4.306	0.105	7.501	8.918	0.020	0.297	0.448	0.598	0.078
Col PET	.852	1.030	0.011	0.017	0.000	1.684	0.106	0.214	7.923	7.743	0.020	4.137	33.418	0.679	0.072
G&W brd	8.221	4.909	0.097	17.175	0.014	0.071	0.173	10.400	2.614	0.613	3.298	0.195	0.373	1.188	0.584
Glass	3.268	2.495	0.007	0.010	98.530	0.000	0.000	0.433	0.170	0.214	0.015	0.000	0.000	0.000	0.016
Misc <45	3.192	10.229	0.177	0.775	0.000	0.276	0.525	3.244	1.358	2.115	0.621	0.681	0.643	1.358	1.160
Misc >45	3.123	11.183	0.281	0.347	0.402	0.410	0.469	1.033	1.407	0.915	0.329	0.522	0.005	0.636	0.702
Nat HDPE	3.225	1.538	0.036	0.121	0.000	39.830	92.500	0.413	14.619	32.613	0.107	0.065	1.084	6.934	0.152
News & Mag	40.170	14.804	0.148	3.033	0.069	0.037	0.063	56.411	2.413	0.472	85.517	0.008	0.006	2.669	0.577
Non-T Fbr	1.972	3.852	0.035	3.734	0.021	0.007	0.018	1.748	1.044	0.155	1.480	0.002	0.150	0.171	0.378
Oth D PI	3.301	12.079	0.170	0.830	0.306	0.735	0.251	0.846	23.570	5.708	0.331	6.170	2.963	13.589	0.608
Oth R Pa	6.463	5.519	0.055	2.211	0.304	0.074	0.339	10.579	2.279	0.356	5.307	0.211	0.748	1.642	0.345
Oth bott	0.801	0.451	0.003	0.117	0.000	2.339	0.614	0.122	8.573	3.397	0.028	0.424	0.903	0.118	0.103
PI film	2.237	6.854	0.131	0.662	0.004	0.132	0.431	0.688	1.907	1.138	0.338	0.270	0.583	60.546	0.938
Ste cans	5.387	1.645	0.282	0.206	0.000	0.027	0.041	0.769	0.140	0.182	0.153	0.003	0.038	0.752	92.808
Beverage cartons	0.984	0.877	0.030	0.431	0.000	0.003	0.016	1.161	0.806	0.143	0.161	0.007	0.016	0.061	0.134
Textiles	0.615	13.412	0.004	0.049	0.000	0.000	0.000	0.085	0.327	0.037	0.051	0.000	0.000	0.053	0.042

Table A2.3 Twin-stream MRF input, output materials and residual material composition (%)

Material	Input	Res	Alu	Card	Glass	HDPE col	HDPE nat	Mx Pa	Mx PI	Mx PI bott	NP	PET clr	PET col	PI Flm	Steel
Alu cans	6.555	2.674	95.844	0.000		0.040	0.026	0.000	4.304	0.011	0.001	0.026			1.246
Alu foil	0.291	0.889	1.982	0.000		0.000	0.001	0.000	0.243	0.017	0.000	0.011			0.096
Brwn brd	6.704	2.364	0.000	75.130		0.000	0.001	13.746	0.182	0.041	2.487	0.000			0.000
Clr PET	10.721	2.739	0.021	0.013		0.144	0.023	0.033	23.059	31.696	0.003	98.120			0.138
Col HDPE	4.482	1.740	0.053	0.007		67.119	0.581	0.000	7.628	17.729	0.001	0.013			0.020
Col PET	2.024	1.902	0.016	0.003		3.325	0.045	0.000	5.040	7.366	0.000	0.702			0.029
G&W brd	4.598	4.516	0.003	13.486		0.000	0.000	12.179	0.309	0.026	5.181	0.000			0.003
Glass	1.115	10.569	0.026	0.000		0.000	0.000	0.058	2.701	0.025	0.045	0.000			0.003
Misc <45	2.415	7.454	0.367	1.155		0.797	0.185	0.945	7.575	1.846	1.251	0.563			0.826
Misc >45	0.683	3.789	0.329	0.182		0.092	0.014	0.334	1.346	0.458	0.130	0.020			0.063
Nat HDPE	10.596	1.622	0.028	0.033		20.646	98.400	0.028	17.344	30.815	0.010	0.027			0.067
News & Mag	17.878	11.149	0.014	6.045		0.022	0.002	63.894	0.640	0.014	80.608	0.000			0.003
Non-T Fbr	0.240	1.955	0.000	0.097		0.000	0.000	0.282	0.041	0.000	0.218	0.000			0.004
Oth D PI	4.599	21.875	0.769	0.031		0.583	0.554	0.080	16.463	6.132	0.006	0.035			0.523
Oth R Pa	2.890	4.555	0.008	3.636		0.000	0.001	7.606	0.116	0.003	9.889	0.000			0.005
Oth bott	0.682	0.957	0.010	0.001		6.490	0.041	0.005	2.771	2.017	0.000	0.261			0.030
PI film	2.160	10.197	0.335	0.102		0.328	0.055	0.443	5.738	1.760	0.092	0.131			0.270
Ste cans	20.761	2.380	0.174	0.000		0.403	0.070	0.000	3.842	0.037	0.002	0.090			96.674
Beverage cartons	0.154	0.540	0.019	0.038		0.009	0.000	0.369	0.520	0.007	0.043	0.000			0.000
Textiles	0.453	6.134	0.003	0.040		0.003	0.000	0.000	0.141	0.000	0.032	0.000			0.001

**Waste & Resources
Action Programme**

The Old Academy
21 Horse Fair
Banbury, Oxon
OX16 0AH

Tel: 01295 819 900
Fax: 01295 819 911
E-mail: info@wrap.org.uk

Helpline freephone
0800 100 2040

www.wrap.org.uk/mrfs

